



E-VISION
EARTH SAFE INSPIRED

Full electric propulsion



WE ARE POWER LOAD

50 YEARS OF
INNOVATION



E-OUTBOARD



**E-X
05**



**E-X
10**



**E-X
20**



**E'DYN
1120**



**E'DYN
2035**

RATED VOLTAGE	48V	48V	48V	48V	96V
RATED POWER	3 kW	6.5 kW	11.5 kW	11 kW	20 kW
RPM ON OUTPUT SHAFT	2000	2600	2400	2400	2400
SYSTEM EFFICIENCY	>90%	>90%	>90%	>90%	>90%
RATED CURRENT (A)	65A	138A	240A	220A	220A
WEIGHT	20 kg	24 kg	29 kg	45 kg	45 kg
DIMENSIONS	660 x 220 x 1100	660 x 220 x 1100	660 x 220 x 1100	670 x 405 x 1151	670 x 405 x 1151
TRIM	/	/	/	Manual	Manual
WATERPROOF	IP56	IP56	IP56	IP56	IP56
PROPELLER SHAFT	Specific	Specific	Specific	Standard	Standard
SUITABLE BATTERIES	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid

E-OUTBOARD



EO8



EO10




EO12



EO20

RATED VOLTAGE	36V	48V	48V	48V
RATED POWER	4.3 kW	5.2 kW	6.5 kW	10 kW
RPM ON OUTPUT SHAFT	1400	1850	1200	1000
SYSTEM EFFICIENCY	85%	85%	85%	88%
RATED CURRENT (A)	120A	120A	150A	200A
WEIGHT	38 kg	25 kg	29 kg	42 kg
DIMENSIONS	472 x 116 x 1130	472 x 116 x 1130	472 x 116 x 1130	551 x 178 x 1140
TRIM	/	/	/	/
WATERPROOF	IP67	IP67	IP67	IP67
PROPELLER SHAFT	Standard	Standard	Standard	Standard
SUITABLE BATTERIES	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid

E-POD

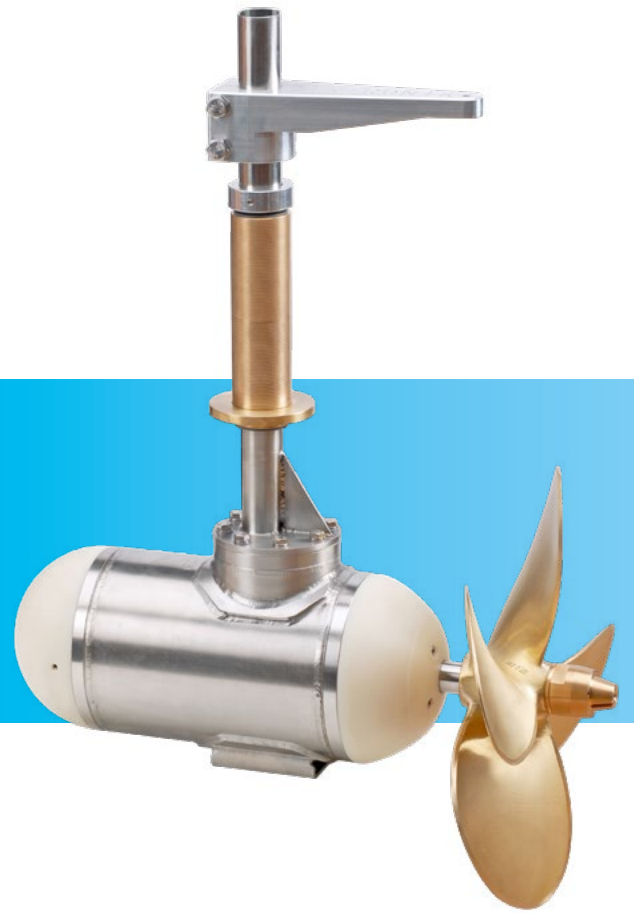

EP4



EP8



EPS3



EPS4



EPS5

RATED VOLTAGE	24V	36V	24V	24V	36V
RATED POWER	1.6 kW	4.3 kW	1.6 kW	1.6 kW	2.4 kW
RPM ON OUTPUT SHAFT	1200	1400	1100	1200	1800
SYSTEM EFFICIENCY	85%	85%	85%	85%	85%
RATED CURRENT (A)	70A	120A	50A	70A	70A
WEIGHT	18 kg	25 kg	18 kg	18 kg	23 kg
DIMENSIONS	395 x 116 x 550	472 x 116 x 1130	395 x 116 x 1140	395 x 116 x 1140	450 x 116 x 1140
TRIM	/	/	/	/	/
WATERPROOF	IP67	IP67	IP67	IP67	IP67
PROPELLER SHAFT	Standard	Standard	Standard	Standard	Standard
SUITABLE BATTERIES	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid




RATED VOLTAGE	36V	48V	48V	48V
RATED POWER	4.3 kW	5.2 kW	6.5 kW	10 kW
RPM ON OUTPUT SHAFT	1400	1850	1200	1000
SYSTEM EFFICIENCY	85%	85%	85%	88%
RATED CURRENT (A)	120A	120A	150A	200A
WEIGHT	25 kg	25 kg	29 kg	42 kg
DIMENSIONS	472 x 116 x 1130	472 x 116 x 1130	472 x 116 x 1140	551 x 178 x 1140
TRIM	/	/	/	/
WATERPROOF	IP67	IP67	IP67	IP67
PROPELLER SHAFT	Standard	Standard	Standard	Standard
SUITABLE BATTERIES	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion or Lead acid

E-INBOARD WATER COOLED



RATED VOLTAGE	48V	96V	220V	220V	300V	360V
RATED POWER	10 kW	20 kW	40 kW	50 kW	60 kW	100 kW
RPM ON OUTPUT SHAFT	1200	2500	2600	3000	3400	3000 A
SYSTEM EFFICIENCY	84%	/	/	91%	92%	92%
RATED CURRENT (A)	205A	200A	200A	230A	230A	250A
WEIGHT	45 kg	45 kg	66 kg	75 kg	75 kg	126 kg
DIMENSIONS	431 x 220 x 220	330 x 390 x 620	428 x 290 x 270	230 x 313 x 473	230 x 313 x 473	352 x 270 x 564
TRIM	/	/	/	/	/	/
WATERPROOF	IP55	IP55	IP55	IP54	IP54	IP54
PROPELLER SHAFT	Standard	Standard	Standard	Standard	Standard	Standard
SUITABLE BATTERIES	Li-Ion or Lead acid	Li-Ion or Lead acid	Li-Ion	Li-Ion	Li-Ion	Li-Ion

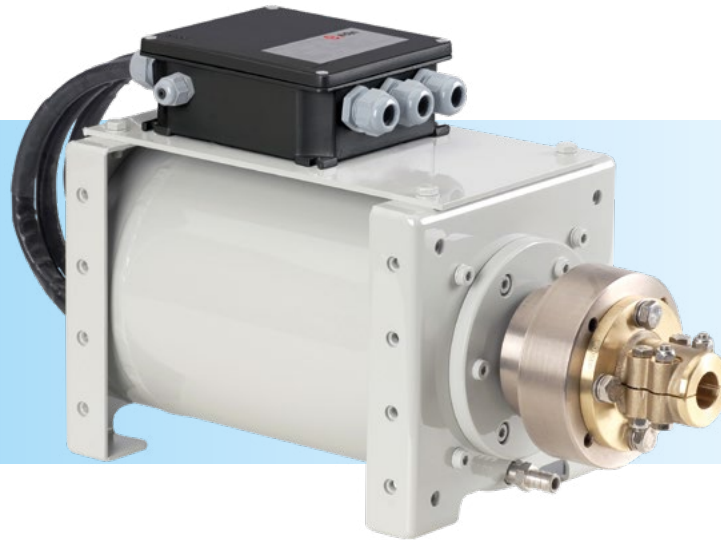

EI180



EI40

RATED VOLTAGE	430V	430V
RATED POWER	125 kW	150 kW
RPM ON OUTPUT SHAFT	3600	3100
SYSTEM EFFICIENCY	94%	94%
RATED CURRENT (A)	290A	320A
WEIGHT	126 kg	170 kg
DIMENSIONS	352 x 270 x 564	370 x 410 x 500
TRIM	/	/
WATERPROOF	IP54	IP54
PROPELLER SHAFT	Standard	Standard
SUITABLE BATTERIES	Li-Ion	Li-Ion



50 YEARS OF
INNOVATION

AS LABRUNA S.R.L.

Contrada S. Stefano, 72 - 70043 Monopoli (BA) - Italia

T. (+39) 080 777 135 F. (+39) 080 777 082 M. aslabruna@aslabruna.it

aslabruna.it